

PRODUCT SELECTION GUIDE — FULL SPECIFICATION CATALOG

Fireclay Kitchen Sink Collection

21 fireclay models — farmhouse, workstation, undermount and dual-color designs,
1280°C kiln-fired with a non-porous glazed surface. Data per official production drawings.

cUPC • CE • UKCA • WaterMark — AVAILABLE ON REQUEST | ISO 9001

21*

SINK MODELS

100+

MOQ (PCS / MODEL)

600K

ANNUAL CAPACITY (PCS)

* 19 sink models; 46 products across three categories.

106,000 m² CAMPUS ZONING PLAN

Global Manufacturing Excellence in Ceramic Sanitary Ware

Established in 2016 in Tangshan—China’s premier ceramic hub—Taitao is a high-tech manufacturer and wholesaler dedicated to premium sanitary ware solutions.

- **Massive Scale**
A state-of-the-art facility spanning 106,000+ m²
- **Core Products**
Professional-grade Ceramic Kitchen Sinks, High-End Toilets, and Wash Basins.
- **Global Reach**
Primary export markets: North America, Europe (including the United Kingdom), and Oceania (Australia and New Zealand).

Manufacturing Capabilities & Core Technology

Our facilities are engineered for precision and high-volume supply, ensuring reliability for:

Advanced Casting Equipment: 1 10-mould high pressure toilet casting machine · 3 12-mould sink casting machines · 1 10-double mould tank casting machine · 43 low-pressure fast drainage vertical pouring molding lines.

High-Capacity Kilns: Utilizing a 96-meter tunnel kiln and a 128m³ shuttle kiln, we achieve an annual production capacity of 600,000 pieces.

Core Technology: 1200–1280°C tunnel-kiln firing gives every piece a dense, non-porous glazed surface for maximum durability, stain resistance and a premium finish.





■ TOPMOUNT CERAMIC INSET SINK · SINGLE BOWL

33-Inch Topmount Ceramic Inset Sink

Size: 860 x 500 x 222 mm
Inner Basin: 400 x 435 x 200 mm
Weight: 24.75 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ TOPMOUNT CERAMIC INSET SINK · SINGLE BOWL

39-Inch Single Bowl Topmount Ceramic Inset Sink

Size: 1000 x 500 x 222 mm
Inner Basin: 400 x 455 x 200 mm
Weight: 30.95 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ TOPMOUNT CERAMIC INSET SINK · 1.5 BOWL

39-Inch 1.5 Bowl Topmount Ceramic Inset Sink

Size: 1000 x 500 x 225 mm
Inner Basin: 400 x 325 x 200 mm
Weight: 30.95 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE WORKSTATION · DOUBLE BASIN + WORKSTATION LEDGE

33 & 36-Inch Apron Farmhouse Workstation Sink

Size: 838 x 510 x 254 mm
Inner Basin: 810 x 460 x 230 mm
Weight: 50.15 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE WORKSTATION · SINGLE BASIN + FLUTED APRON + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025-Series

Size: 756 x 510 x 251 mm
Inner Basin: 706 x 460 x 222 mm
Weight: 43.95 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE WORKSTATION · SINGLE BASIN + FLUTED APRON + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025K-Series

Size: 756 x 510 x 254 mm
Inner Basin: 706 x 460 x 226 mm
Weight: 45.75 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE WORKSTATION · SINGLE BASIN + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025U-Series

Size: 756 x 510 x 254 mm
Inner Basin:
Weight: 46.2 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE · SINGLE BASIN

36-Inch Apron Farmhouse Sink

Size: 908 x 502 x 251 mm
Inner Basin: 864 x 458 x 222 mm
Weight: 50.15 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ DOUBLE BOWL FARMHOUSE · 50/50 DOUBLE EQUAL BASIN

33-Inch Double Bowl Farmhouse Sink

Size: 826 x 502 x 251 mm
Inner Basin: 380 x 458 x 222 mm (each basin)
Weight: 48.85 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days





■ FLUTED APRON FARMHOUSE · SINGLE BASIN

33-Inch Fluted Apron Farmhouse Sink

Size: 832 x 502 x 251 mm
Inner Basin:
Weight: 45.3 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE · EXTRA DEEP SINGLE BASIN

30-Inch Apron Farmhouse Sink

Size: 756 x 502 x 251 mm
Inner Basin:
Weight: 42 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ UNDERMOUNT SERIES · SINGLE BASIN

30-Inch Undermount Series Sink

Size: 762 x 457 x 254 mm
Inner Basin:
Weight: 33.3 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE WORKSTATION · SINGLE BASIN + SMOOTH APRON + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S12183-Series

Size: 838 x 510 x 254 mm
Inner Basin: 790 x 460 x 228 mm
Weight: 50.8 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days




■ APRON FARMHOUSE WORKSTATION · SINGLE BASIN + TWO-TONE APRON + WORKSTATION LEDGE

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S12183-TwoTone

Size: 838 x 510 x 254 mm
Inner Basin: 790 x 460 x 228 mm
Weight: 50.8 KG

Scan for full specification & drawings
Finish: Two-Tone: Glossy White Interi...
MOQ 100 pcs · Lead time 30 days

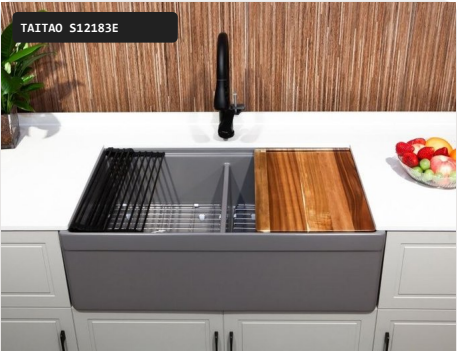

■ DOUBLE BOWL FARMHOUSE WORKSTATION · 50/50 DOUBLE EQUAL BASIN + SMOOTH APRON + WORKSTATION LEDGE

33-Inch Double Bowl Farmhouse Workstation Sink

Size: 838 x 510 x 254 mm
Inner Basin: 788 x 460 x 228 mm, both basins combined
Weight: 53.95 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ DUAL-COLOR WORKSTATION · SINGLE BASIN + TRACK

24-Inch Dual-Color Workstation Sink

Size: 610 x 510 x 254 mm
Inner Basin: 582 x 460 x 226 mm
Weight: 35.65 KG

Scan for full specification & drawings
Finish: Dual-Color (Black & White)
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE WORKSTATION · SINGLE BASIN + WORKSTATION LEDGE

33-Inch Single Basin Apron Farmhouse Workstation Sink · S332014

Size: 838 x 510 x 254 mm
Inner Basin: 810 x 460 x 230 mm
Weight: 46.25 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE WORKSTATION · SINGLE BASIN + WORKSTATION LEDGE + DUAL BAR APRON

33-Inch Single Basin Apron Farmhouse Workstation Sink · S332014H

Size: 838 x 510 x 254 mm
Inner Basin: 788 x 460 x 227 mm
Weight: 45.8 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days





■ APRON FARMHOUSE SINK · SINGLE BASIN HEAVY APRON-FRONT

33-Inch Apron Farmhouse Sink

Size: 838 x 510 x 254 mm
Inner Basin: 778 x 480 x 238 mm
Weight: 49.35 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE WORKSTATION · DOUBLE BASIN (50/50) · WORKSTATION LEDGE · FLUTED APRON

33-Inch Double Basin (50/50) Apron Farmhouse Workstation Sink · S332025KE

Size: 838 x 510 x 254 mm
Inner Basin: 788 x 460 x 226 mm
Weight: 53.15 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



■ APRON FARMHOUSE WORKSTATION · DOUBLE BASIN (50/50) · WORKSTATION LEDGE · REVERSIBLE FLUTED APRON

33-Inch Double Basin (50/50) Apron Farmhouse Workstation Sink · S332025E

Size: 838 x 510 x 251 mm
Inner Basin: 788 x 504 x 222 mm
Weight: 52.65 KG

Scan for full specification & drawings
Finish: Glossy Alabaster White
MOQ 100 pcs · Lead time 30 days



Order Terms & Lead Time

ORDER TERMS

- MOQ 100 pcs per model, on existing factory moulds.
- Standard finishes: Glossy White, Matte White, Matte Grey and Matte Black, plus Dual-Color and Two-Tone bodies.
- Your mark kiln-fired under-glaze, laser-etched, or printed on the packaging.
- Container consolidation across several models available for distributors.

LEAD TIME

- 30 days — MOQ 100 pcs, ocean container dispatched.
- 50 days — bulk 1,000 pcs, ocean container dispatched.
- New OEM tooling, counted from design approval: 45 days to a fired first sample.
- 90 days to a finished 1,000 pcs OEM order.
- Approval samples are dispatched by air courier ahead of the bulk run.

SAMPLES & DRAWINGS

- Samples available for catalog models and selected custom work.
- Sample cost and freight are normally covered by the buyer, then credited against the bulk order.
- Technical drawings are available for the models in your enquiry.
- Dimensional data is always taken from the drawing for the model you are ordering.
- Never inferred from a generic catalogue page. File formats confirmed at quotation.

Compliance, Testing & Contact

LISTINGS

- cUPC, CE, UKCA and WaterMark — certificate numbers available on request.
- ISO 9001 quality management system.
- Listings are issued for specific models, not for a whole range.
- Send the model numbers you intend to ship and we confirm the scope that covers them.
- A single model can carry all four listings for multi-market distribution.

TESTING & PACKAGING

- ISTA-3A Certified packaging drop test.
- 5-ply moulded honeycomb export carton, drop-tested.
- Fired through a 96 m tunnel kiln at 1200–1280°C; the glaze matures in the same firing.
- Glaze is fused to the body in one firing — no bonded layer, no delamination.
- No metal inside the body — nothing to rust if the surface is ever damaged.


CONTACT

- Export Desk — service@taitao-hs.com
- WhatsApp — +86 139 1106 5773
- Full catalogue and CAD files — www.taitao-hs.com/downloads/
- OEM / ODM and private label available.
- Tangshan Taitao Sanitary Ware Co., Ltd. — Tangshan, Hebei, China.

TAITAO CD86

33-Inch Topmount Ceramic Inset Sink

TOPMOUNT · TOPMOUNT-RIM · SINGLE BOWL

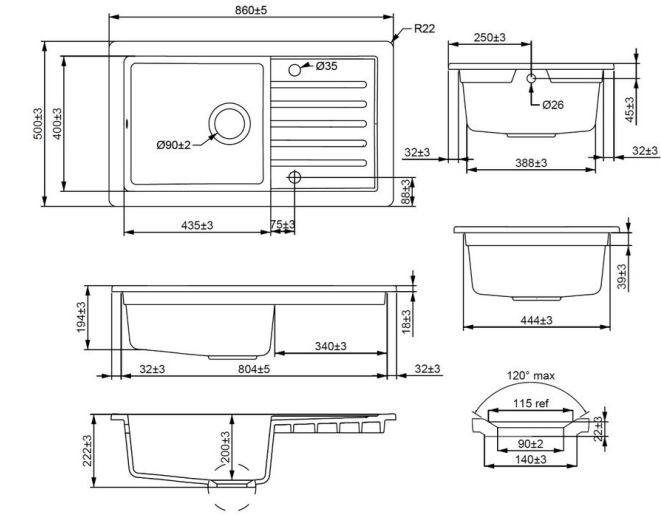

Total Width (Outer)	33.86 inches (860 mm ± 5mm)
Min Base Cabinet	36" (90 cm)
Total Depth (Outer)	19.69 inches (500 mm ± 3mm)
Total Height (Outer)	8.74 inches (222 mm ± 3mm)
Inner Basin (L x W x D)	15.75" x 17.13" x 7.87" (400 x 435 x 200 mm)
Wall Rim Thickness	0.71" (18mm ± 3mm) Inset Rim
Net Weight	24.75 KG
Manufacturing Tolerance	±5mm Width, ±3mm Height/Depth
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	N/A – solid reinforced rim design
Installation Mountings:	Topmount / Drop-In, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Reversible Drainer
- Compact 33.86" / 860mm Fit
- 24.75kg Lightweight
- Solid Fireclay 1280°C Core

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online




TAITAO CD100

39-Inch Single Bowl Topmount Ceramic Inset Sink

TOPMOUNT · TOPMOUNT-RIM · SINGLE BOWL



PRODUCT VIEW

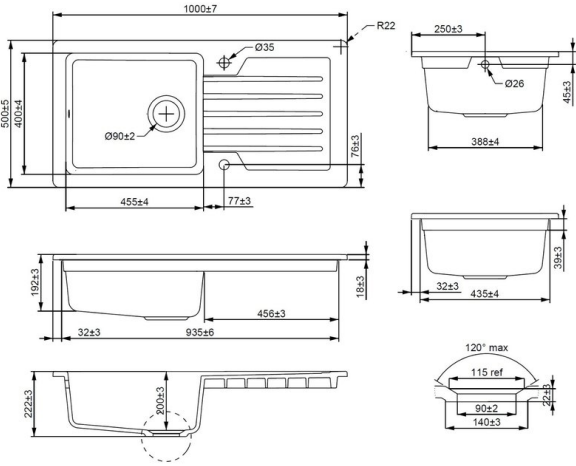

DIMENSIONAL DRAWING

Total Width (Outer)	39.37 inches (1000 mm ± 7mm)
Min Base Cabinet	42" (105 cm)
Total Depth (Outer)	19.69 inches (500 mm ± 5mm)
Total Height (Outer)	8.74 inches (222 mm ± 3mm)
Inner Basin (L x W x D)	15.75" x 17.91" x 7.87" (400 x 455 x 200 mm)
Wall Rim Thickness	0.71" (18mm ± 3mm) Inset Rim
Net Weight	30.95 KG
Manufacturing Tolerance	±7mm Width, ±5mm Depth, ±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	N/A – solid reinforced rim design
Installation Mountings:	Topmount / Drop-In, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Reversible Drainer
- Extra-Long 39.37" / 1000mm Basin
- 30.95kg Full-Size
- Solid Fireclay 1280°C Core

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com


Scan to open the product page
and view the drawing set online



TAITAO CD150

39-Inch 1.5 Bowl Topmount Ceramic Inset Sink

TOPMOUNT · TOPMOUNT-RIM · 1.5 BOWL

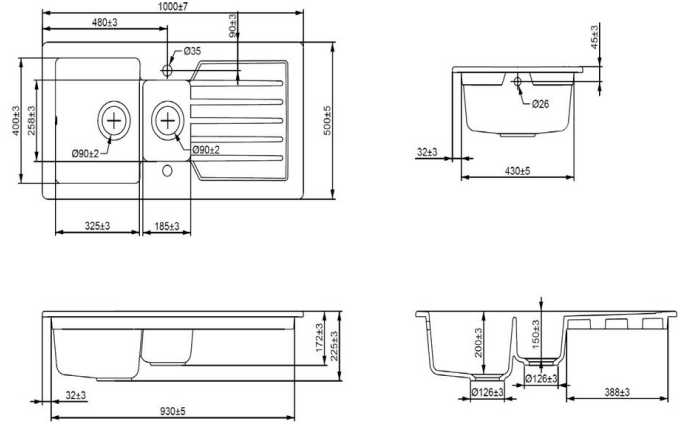

Total Width (Outer)	39.37 inches (1000 mm ± 7mm)
Min Base Cabinet	42" (105 cm)
Total Depth (Outer)	19.69 inches (500 mm ± 5mm)
Total Height (Outer)	8.86 inches (225 mm ± 3mm)
Inner Basin (L x W x D)	15.75" x 12.80" x 7.87" (400 x 325 x 200 mm)
Wall Rim Thickness	0.71" (18mm ± 3mm) Inset Rim
Net Weight	30.95 KG
Manufacturing Tolerance	±7mm Width, ±5mm Depth, ±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	N/A – solid reinforced rim design
Installation Mountings:	Topmount / Drop-In, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- 1.5 Bowl (Main + Half)
- Dual-Zone Wash & Drain
- Reversible Drainer
- Solid Fireclay 1280°C Core

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online




TAITAO S2014E-Series

33 & 36-Inch Apron Farmhouse Workstation Sink


FARMHOUSE · SMOOTH · DOUBLE BASIN + WORKSTATION LEDGE

33-INCH DRAWING

36-INCH DRAWING

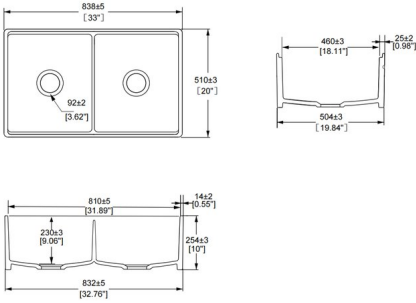

S362014E

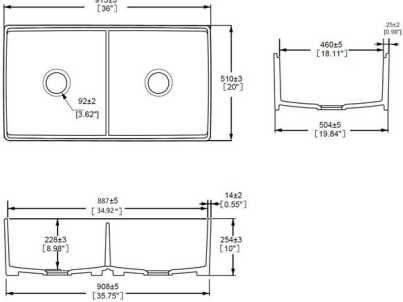

PRODUCT VIEW	
Total Width (Outer)	33.0 inches (838 mm ± 5mm)
Min Base Cabinet	36" (91 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	31.89" x 18.11" x 9.06" (810 x 460 x 230 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Apron
Net Weight	50.15 KG
Manufacturing Tolerance	±5mm Width, ±3mm Height/Depth
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Integrated Workstation Ledge
- Double Bowl Design
- Apron-Front Farmhouse

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S2025-Series

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025-Series


FARMHOUSE · FLUTED · SINGLE BASIN + FLUTED APRON + WORKSTATION LEDGE

30-INCH DRAWING


33-INCH DRAWING



S302025

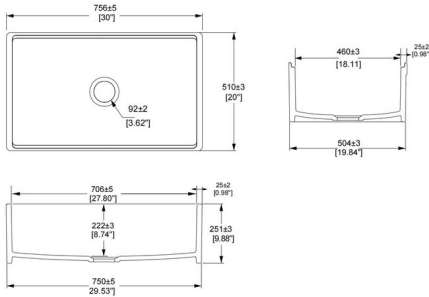

S332025

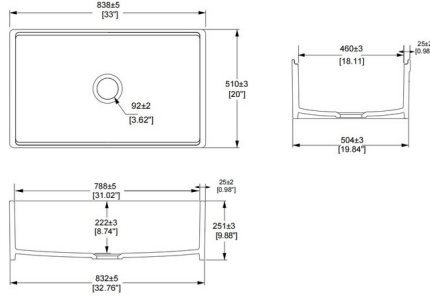

PRODUCT VIEW	
Total Width (Outer)	30.0 inches (756 mm ± 5mm)
Min Base Cabinet	33" (84 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	9.88 inches (251 mm ± 3mm)
Inner Basin (L x W x D)	27.80" x 18.11" x 8.74" (706 x 460 x 222 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Fluted Apron
Net Weight	43.95 KG
Manufacturing Tolerance	±5mm Width, ±3mm Height/Depth
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Fluted Apron Front
- Single Bowl Workstation Ledge
- 30" Standard 30.0"
- Solid Fireclay 1280°C Core

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S2025K-Series

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025K-Series


FARMHOUSE · FLUTED · SINGLE BASIN + FLUTED APRON + WORKSTATION LEDGE

30-INCH DRAWING


33-INCH DRAWING



S302025K



S332025K

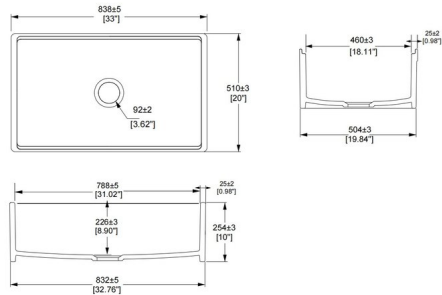

PRODUCT VIEW	
Total Width (Outer)	30.0 inches (756 mm ± 5mm)
Min Base Cabinet	33" (84 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	27.80" x 18.11" x 8.90" (706 x 460 x 226 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Fluted Apron
Net Weight	45.75 KG
Manufacturing Tolerance	±5mm Width, ±3mm Height/Depth
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Fluted Apron Front
- Single Bowl Workstation Ledge
- 30" & 33" Dual Sizes
- Solid Fireclay 1280°C Core

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S2025U-Series

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S2025U-Series


FARMHOUSE · SMOOTH · SINGLE BASIN + WORKSTATION LEDGE

30-INCH DRAWING


33-INCH DRAWING



S302025U

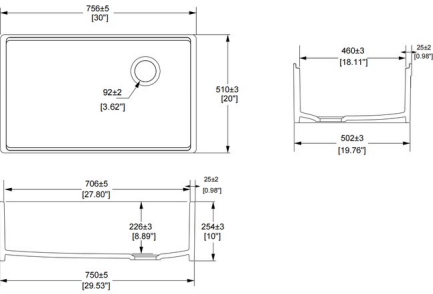

S332025U

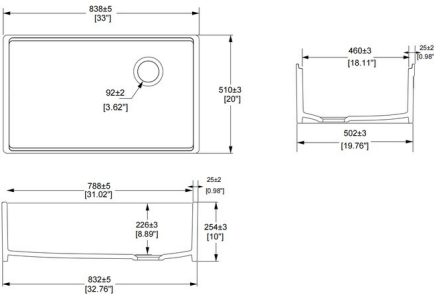

PRODUCT VIEW	
Total Width (Outer)	30.0 inches (756 mm ± 5mm)
Min Base Cabinet	33" (84 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	27.80" x 18.11" x 8.89" (706 x 460 x 226 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Apron
Net Weight	46.2 KG
Manufacturing Tolerance	±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Smooth Apron Front
- Dual-Size 30" & 33"
- Integrated Workstation Ledge
- 1280°C Fireclay Core

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S12108


36-Inch Apron Farmhouse Sink

FARMHOUSE · SMOOTH · SINGLE BASIN



PRODUCT VIEW

S12108

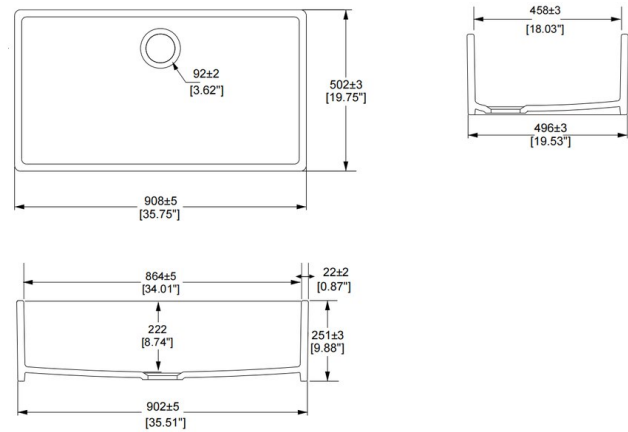

DIMENSIONAL DRAWING

Total Width (Outer)	35.75 inches (908 mm ± 5mm)
Min Base Cabinet	39" (99 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	19.75 inches (502 mm ± 3mm)
Total Height (Outer)	9.88 inches (251 mm ± 3mm)
Inner Basin (L x W x D)	34.01" x 18.03" x 8.74" (864 x 458 x 222 mm)
Wall Rim Thickness	0.87" (22mm ± 2mm) Apron
Net Weight	50.15 KG
Manufacturing Tolerance	±5mm Width, ±3mm Height/Depth
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	N/A – solid reinforced rim design
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Smooth Apron Front
- 36-Inch Wide Basin
- Extra-Deep 8.74" Bowl
- 1280°C Fireclay Core
- Non-Porous Glaze

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S12126


33-Inch Double Bowl Farmhouse Sink

DOUBLE-BOWL · SMOOTH · 50/50 DOUBLE EQUAL BASIN



PRODUCT VIEW

S12126

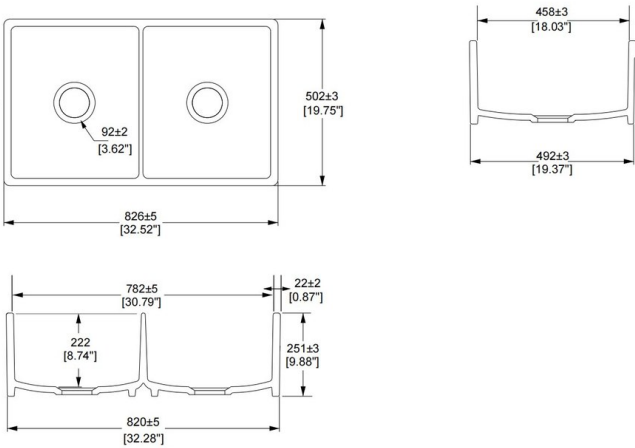

DIMENSIONAL DRAWING

Total Width (Outer)	32.52 inches (826 mm ± 5mm)
Min Base Cabinet	36" (91 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	19.75 inches (502 mm ± 3mm)
Total Height (Outer)	9.88 inches (251 mm ± 3mm)
Inner Basin (L x W x D)	14.96" x 18.03" x 8.74" (380 x 458 x 222 mm (each basin))
Wall Rim Thickness	0.87" (22mm ± 2mm) Apron
Net Weight	48.85 KG
Manufacturing Tolerance	±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	N/A – solid reinforced rim design
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Dual Equal Chambers
- Center Divider Support
- Dual 3.5" Drains
- ±5mm Width Tolerance

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S12132


33-Inch Fluted Apron Farmhouse Sink

FARMHOUSE · FLUTED · SINGLE BASIN



PRODUCT VIEW

S12132

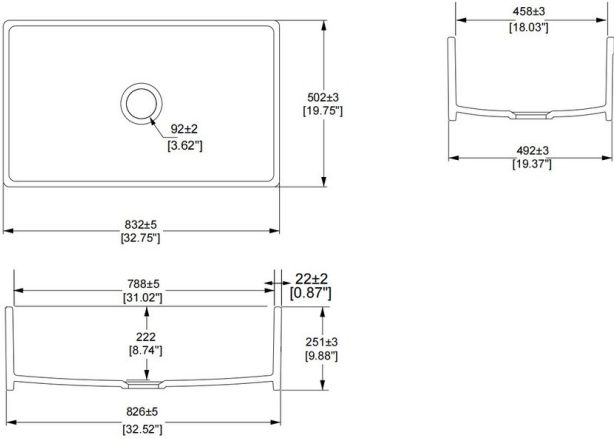

DIMENSIONAL DRAWING

Total Width (Outer)	32.75 inches (832 mm ± 5mm)
Min Base Cabinet	36" (91 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	19.75 inches (502 mm ± 3mm)
Total Height (Outer)	9.88 inches (251 mm ± 3mm)
Inner Basin (L x W x D)	31.02" x 18.03" x 8.74" (788 x 458 x 222 mm)
Wall Rim Thickness	0.87" (22mm ± 2mm) Apron
Net Weight	45.3 KG
Manufacturing Tolerance	±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	N/A – solid reinforced rim design
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Decorative Fluted Apron Front
- High-Pressure Casting
- 1280°C Solid-Core Kiln Firing
- Non-Porous Stain-Resistant Glaze

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S12156


30-Inch Apron Farmhouse Sink

FARMHOUSE · SMOOTH · EXTRA DEEP SINGLE BASIN



PRODUCT VIEW

S12156

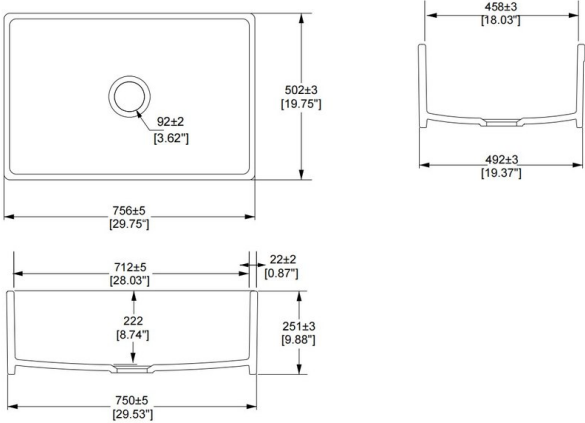

DIMENSIONAL DRAWING

Total Width (Outer)	29.75 inches (756 mm ± 5mm)
Min Base Cabinet	33" (84 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	19.75 inches (502 mm ± 3mm)
Total Height (Outer)	9.88 inches (251 mm ± 3mm)
Inner Basin (L x W x D)	28.03" x 18.03" x 8.74" (712 x 458 x 222 mm)
Wall Rim Thickness	0.87" (22mm ± 2mm) Apron
Net Weight	42 KG
Manufacturing Tolerance	±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	N/A – solid reinforced rim design
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Smooth Apron Front
- 29.75" Wide-Body
- Extra-Deep 28.03" Basin
- 1280°C Kiln Firing
- Non-Porous Glaze

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S12162


30-Inch Undermount Series Sink

UNDERMOUNT · UNDERMOUNT-RIM · SINGLE BASIN



PRODUCT VIEW

S12162

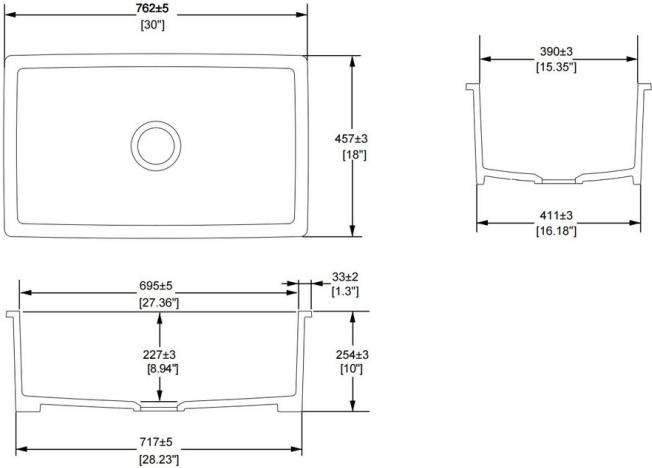

DIMENSIONAL DRAWING

Total Width (Outer)	30.0 inches (762 mm ± 5mm)
Min Base Cabinet	33" (84 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	18.0 inches (457 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	27.36" x 15.35" x 8.94" (695 x 390 x 227 mm)
Wall Rim Thickness	0.71" (18mm)
Net Weight	33.3 KG
Manufacturing Tolerance	±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	N/A – solid reinforced rim design
Installation Mountings:	Undermount / Drop-In (Topmount)
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Seamless Undermount Rim
- Flat Mounting Edge
- Non-Porous Glaze
- Heavy-Duty Fireclay

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S12183-Series

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S12183-Series


FARMHOUSE · SMOOTH · SINGLE BASIN + SMOOTH APRON + WORKSTATION LEDGE

30-INCH DRAWING


33-INCH DRAWING



S12183-30"



S12183-33"



PRODUCT VIEW	
Total Width (Outer)	30.0 inches (762 mm ± 5mm)
Min Base Cabinet	33" (84 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	28.03" x 18.11" x 8.9" (712 x 460 x 227 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Apron
Net Weight	41.25 KG
Manufacturing Tolerance	±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Smooth Apron Front
- Single Bowl Workstation Ledge
- Dual-Size 30" & 33"
- Solid Fireclay 1280°C Core

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S12183-TwoTone

30 & 33-Inch Single Basin Apron Farmhouse Workstation Sink · S12183-TwoTone


FARMHOUSE · SMOOTH · SINGLE BASIN + TWO-TONE APRON + WORKSTATION LEDGE

30-INCH DRAWING


33-INCH DRAWING



S12183-30"



S12183-33"

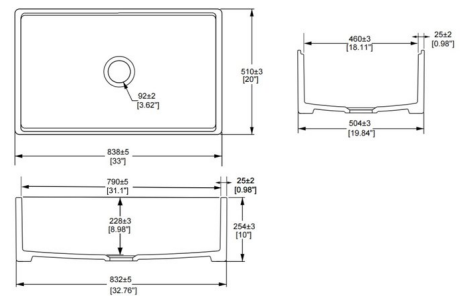

PRODUCT VIEW	
Total Width (Outer)	30.0 inches (762 mm ± 5mm)
Min Base Cabinet	33" (84 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	28.03" x 18.11" x 8.9" (712 x 460 x 227 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Apron
Net Weight	41.25 KG
Manufacturing Tolerance	±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Two-Tone Multi-Color Apron
- 30" & 33" Dual-Size
- Integrated Workstation Ledge
- Solid Fireclay 1280°C Core
- Reversible Basin Drain

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S12183E


33-Inch Double Bowl Farmhouse Workstation Sink

FARMHOUSE · SMOOTH · 50/50 DOUBLE EQUAL BASIN + SMOOTH APRON + WORKSTATION LEDGE



PRODUCT VIEW

S12183E

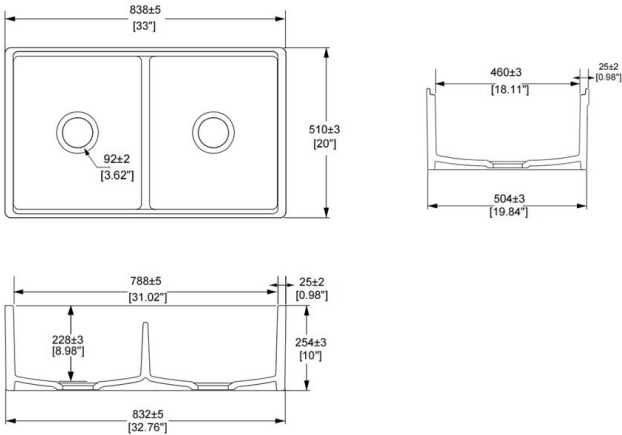

DIMENSIONAL DRAWING

Total Width (Outer)	33.0 inches (838 mm ± 5mm)
Min Base Cabinet	36" (91 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	31.02" x 18.11" x 8.98" (788 x 460 x 228 mm, both basins combined)
Wall Rim Thickness	0.98" (25mm ± 2mm) Apron
Net Weight	53.95 KG
Manufacturing Tolerance	±5mm Width, ±3mm Depth, ±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- 50/50 Double Equal Bowl
- Integrated Workstation Ledge
- Smooth Apron Front
- Dual 3.5" Drains
- White / Matte Gray / Matte Black

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online




TAITAO S242014

24-Inch Dual-Color Workstation Sink

DUAL-COLOR · DUAL-COLOR · SINGLE BASIN + TRACK



S-242014

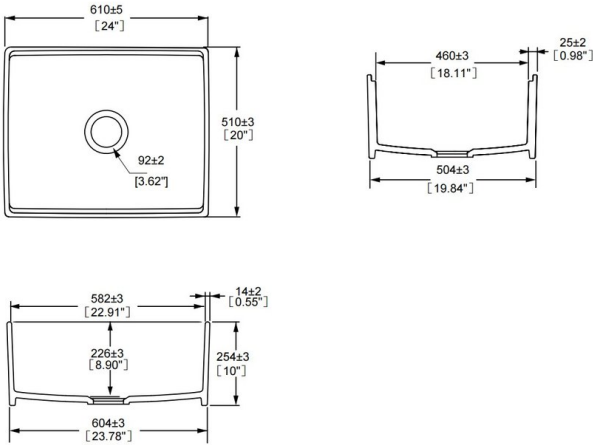

Total Width (Outer)	24.0 inches (610 mm ± 5mm)
Min Base Cabinet	27" (69 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	22.9" x 18.1" x 8.9" (582 x 460 x 226 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Apron
Net Weight	35.65 KG
Manufacturing Tolerance	±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE Standard
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Dual-Color Glaze
- Built-in Accessory Ledge
- 1280°C Fireclay Core
- Non-Porous Finish

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online




TAITAO S332014

33-Inch Single Basin Apron Farmhouse Workstation Sink · S332014

FARMHOUSE · SMOOTH · SINGLE BASIN + WORKSTATION LEDGE



S332014

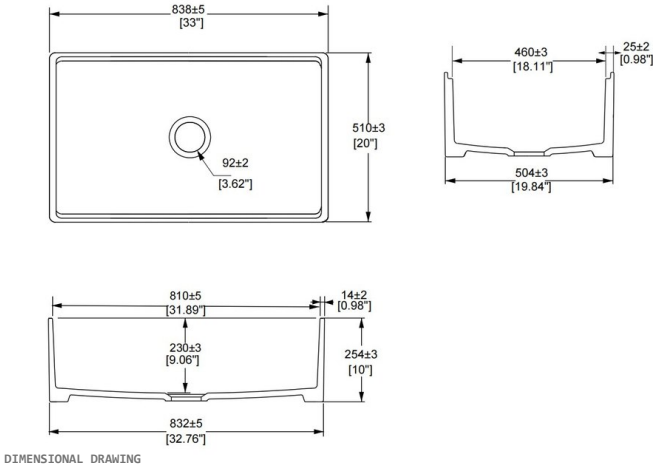

Total Width (Outer)	33.0 inches (838 mm ± 5mm)
Min Base Cabinet	36" (91 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	31.89" x 18.11" x 9.06" (810 x 460 x 230 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Apron
Net Weight	46.25 KG
Manufacturing Tolerance	±5mm Width, ±3mm Height/Depth
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Smooth Apron Front
- 33" Wide-Basin 31.89"
- Integrated Workstation Ledge
- 1280°C Fireclay Core

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S332014H


33-Inch Single Basin Apron Farmhouse Workstation Sink · S332014H

FARMHOUSE · SMOOTH · SINGLE BASIN + WORKSTATION LEDGE + DUAL BAR APRON



PRODUCT VIEW

S332014H

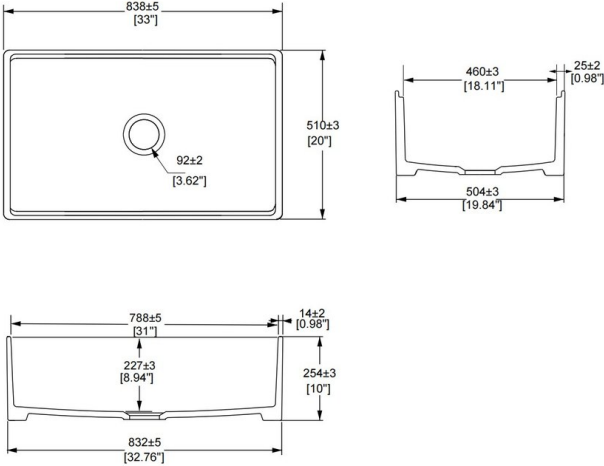

DIMENSIONAL DRAWING

Total Width (Outer)	33.0 inches (838 mm ± 5mm)
Min Base Cabinet	36" (91 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	31.0" x 18.11" x 8.94" (788 x 460 x 227 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Apron
Net Weight	45.8 KG
Manufacturing Tolerance	±5mm Width, ±3mm Height/Depth
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Dual-Bar Apron Front
- Integrated Workstation Ledge
- High-Pressure Casting
- 1280°C Solid-Core Kiln Firing

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S332018P


33-Inch Apron Farmhouse Sink

FARMHOUSE · SMOOTH · SINGLE BASIN HEAVY APRON-FRONT



PRODUCT VIEW

S332018P

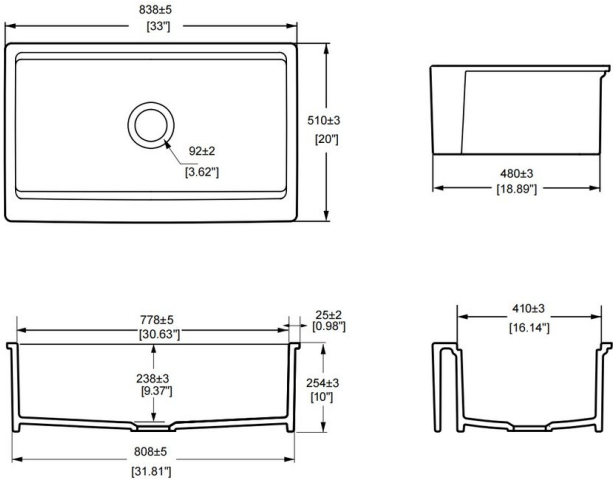

DIMENSIONAL DRAWING

Total Width (Outer)	33.0 inches (838 mm ± 5mm)
Min Base Cabinet	36" (91 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	30.63" x 18.89" x 9.37" (778 x 480 x 238 mm)
Wall Rim Thickness	2.76" (70mm ± 2mm) Heavy Apron
Net Weight	49.35 KG
Manufacturing Tolerance	±5mm Width, ±3mm Height/Depth
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	N/A – solid reinforced rim design
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- 70mm Extra-Thick Apron
- Heavy-Duty 49.35kg
- Apron-Front Farmhouse
- Solid Fireclay 1280°C Core

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online



TAITAO S332025KE


33-Inch Double Basin (50/50) Apron Farmhouse Workstation Sink · S332025KE

FARMHOUSE · FLUTED · DOUBLE BASIN (50/50) + WORKSTATION LEDGE + FLUTED APRON



PRODUCT VIEW

S332025KE

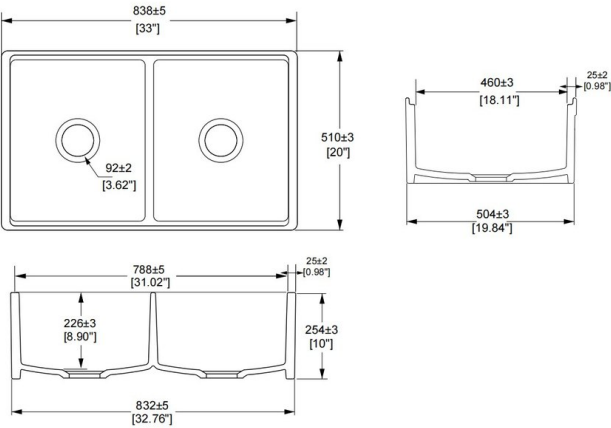

DIMENSIONAL DRAWING

Total Width (Outer)	33.0 inches (838 mm ± 5mm)
Min Base Cabinet	36" (91 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	10.0 inches (254 mm ± 3mm)
Inner Basin (L x W x D)	31.02" x 18.11" x 8.90" (788 x 460 x 226 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Fluted Apron
Net Weight	53.15 KG
Manufacturing Tolerance	±5mm Width, ±3mm Height/Depth
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Fluted Apron Front
- 50/50 Double Bowl Workstation
- Solid Fireclay 1280°C Core

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online




TAITAO S332025E

33-Inch Double Basin (50/50) Apron Farmhouse Workstation Sink · S332025E

FARMHOUSE · FLUTED · DOUBLE BASIN (50/50) + WORKSTATION LEDGE + REVERSIBLE FLUTED APRON



S332025E

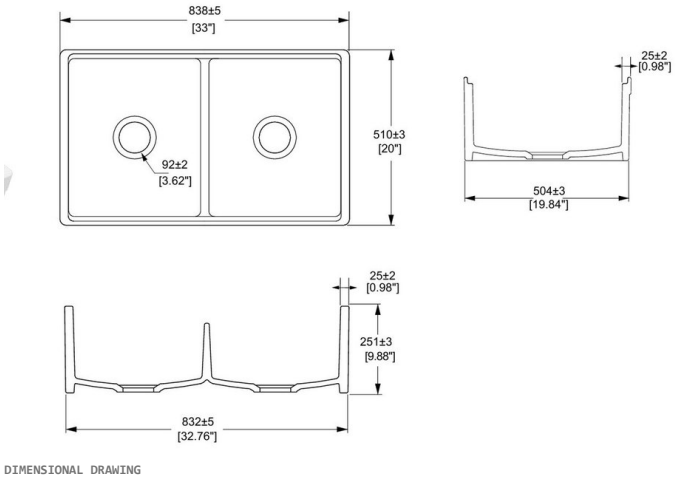

Total Width (Outer)	33.0 inches (838 mm ± 5mm)
Min Base Cabinet	36" (91 cm) – 3" clearance rule: 1.5" per side
Total Depth (Outer)	20.0 inches (510 mm ± 3mm)
Total Height (Outer)	9.88 inches (251 mm ± 3mm)
Inner Basin (L x W x D)	31.02" x 19.84" x 8.74" (788 x 504 x 222 mm)
Wall Rim Thickness	0.98" (25mm ± 2mm) Apron
Net Weight	52.65 KG
Manufacturing Tolerance	±5mm Width, ±3mm Depth, ±3mm Height
Clay Core Composition:	Refined Silicate-Alumina Fine Fireclay
Firing Process:	Slow Continuous Tunnel Kiln Firing
Peak Tunnel Kiln Temp:	1280°C Core Vitrification
Hydrophobic Glaze:	Triple-Coated Fused Glass Glaze Sealant
Thermal Shock Limit:	FOB Standard Up to 1000°F (538°C)
Drainage Hole Diameter:	Standard 3.5 inches (92mm ± 2mm)
Waste Disposal Fit:	100% standard flange / disposer compatible
Workstation Ledge:	Integrated 0.40" (12mm) stepped dual-tier ledge
Installation Mountings:	Apron-Front Farmhouse, Undermount, Flush
Wholesale Standards:	cUPC (USA & Canada), CE (European Union), UKCA (United Kingdom), WaterMark (Australia & New Zealand)
Transit drop safety:	ISTA-3A Certified Packaging Drop Test
B2B Manufacturing Lead:	30 Days (MOQ 100 pcs) / 50 Days (1,000 pcs) Ocean container dispatched

Key Features

- Fluted Apron Front
- 50/50 Double Bowl
- Integrated Workstation Ledge
- Dual 3.5" Drains
- White / Matte Gray / Matte Black

cUPC · CE · UKCA · WaterMark – AVAILABLE ON REQUEST | ISO 9001

TANGSHAN TAITAO SANITARY WARE CO., LTD. · www.taitao-hs.com
B2B Wholesale & OEM / ODM · Export Desk: service@taitao-hs.com

Scan to open the product page
and view the drawing set online

